


Security Sounder™

Installation Manual

Version 1.2

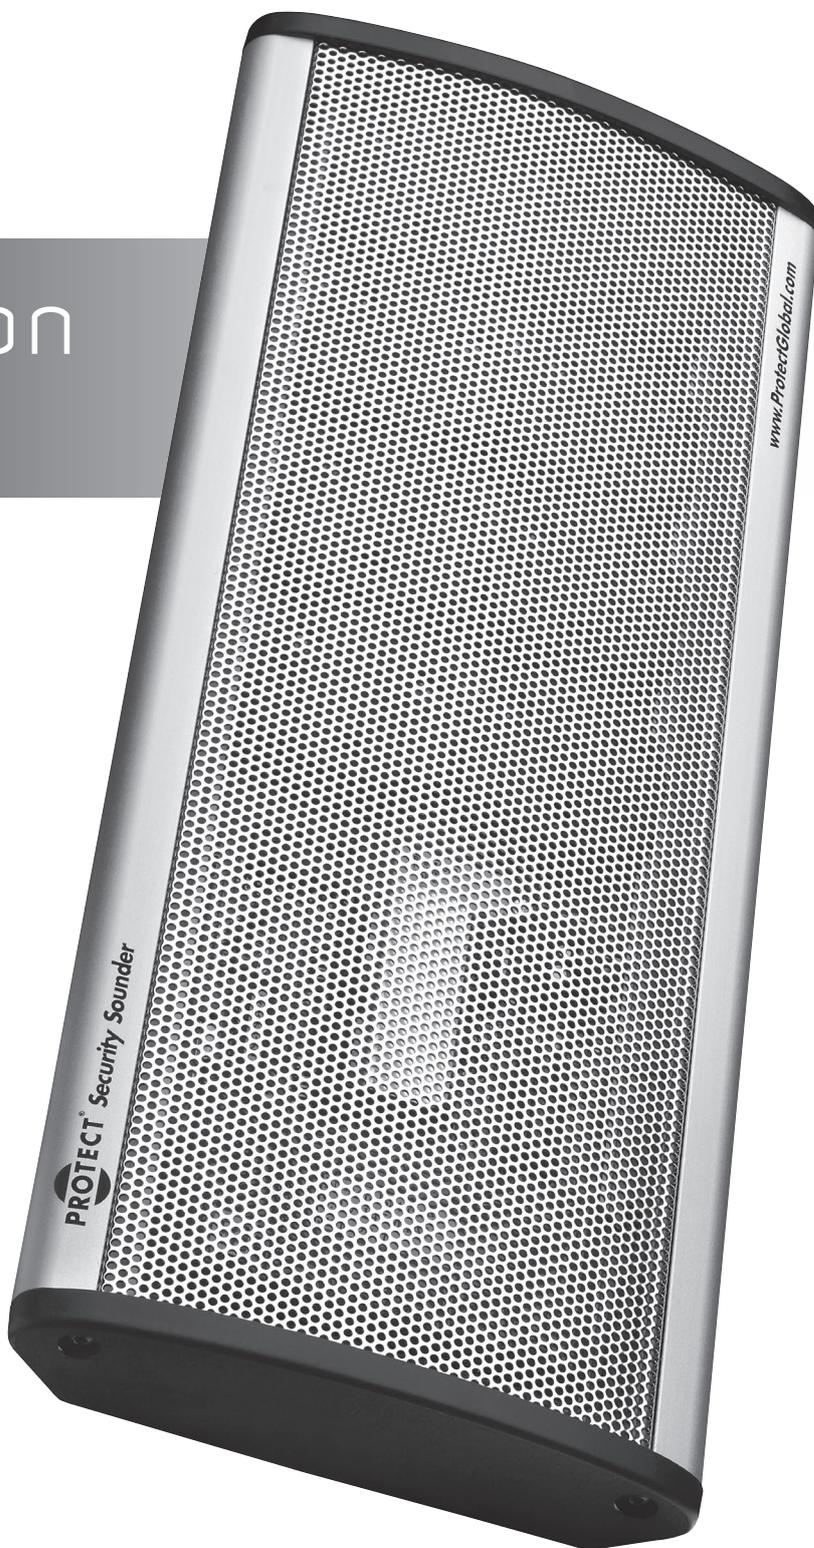

SECURED IN SECONDS

PROTECT Security Sounder™ is an ideal teammate of the PROTECT Fog Cannon™.

It produces an intolerable, but harmless, noise which instantly disrupts the intruders and makes it impossible to communicate with outside accomplices.

Technical info:

Maximum sound output:	120 dB
Power connection:	12 V, 1 A
Rechargeable:	Yes, integrated, rechargeable battery
Function time:	Working time can be set between 30 sec. and 8 min. (5 settings)
Trigger delay:	1, 3 and 6 seconds (3 settings)
Dimensions (cm):	L: 40,5 x D: 4,2 x W: 15,9
Weight:	2 kg
CE marked:	Yes
Mounting:	Wall/Ceiling

We reserve the rights to modify due to misprint or changes in the technical data.

Note

Remember to connect the battery to the socket on the PCB before operation.


In order to give the battery a longer lifetime, remember to unplug the battery when the sounder is not used for long time.

Check the battery at the yearly service inspection of the alarm system.

Cabling of PROTECT Security Sounder™





Cable access through the plastic end-caps is possible. Simply cut the prepared blankets using a sharp plier.

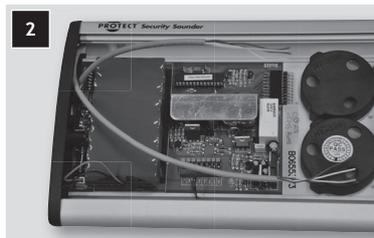

Cables shown entering the Sounder through these cable access holes.



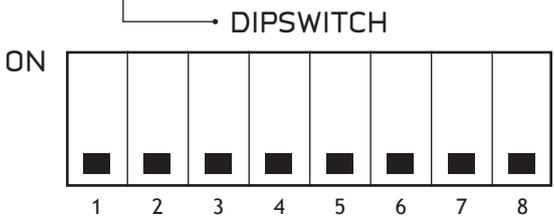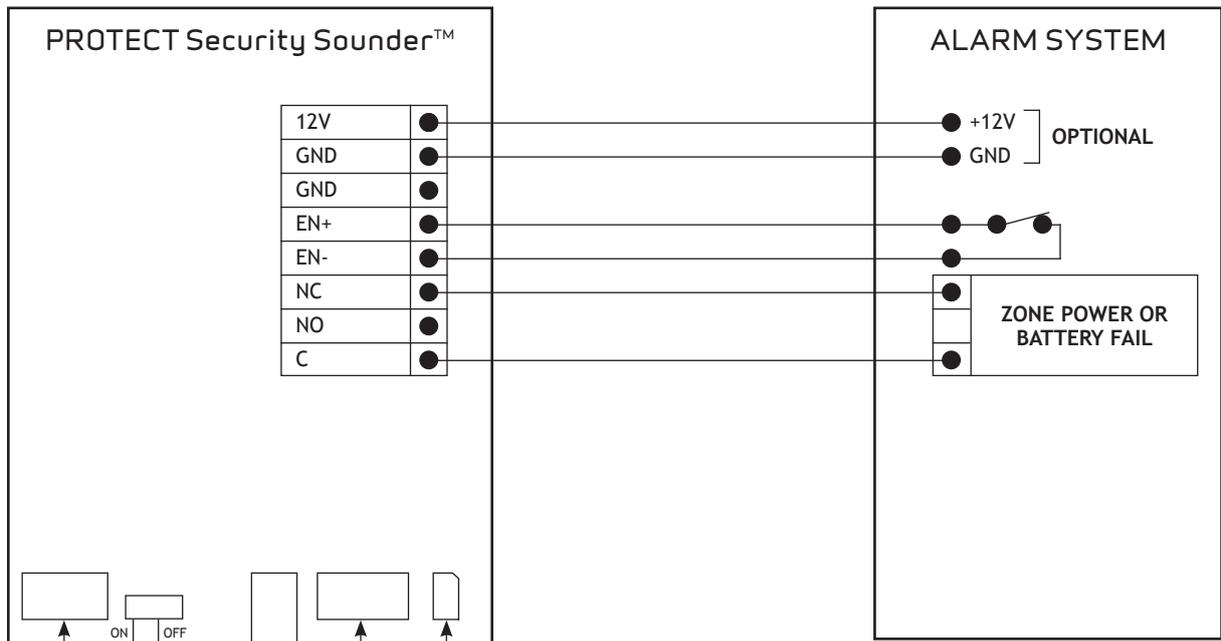

								0	Sounder volumen - normal mode
								1	Sounder Volumen - very low - only for test
								0	Sounder on - normal mode
								1	Sounder off - to avoid wrong operation DURING INSTALLATION
				0	0				Sounder trigger delay - 1 second
				1	0				Sounder trigger delay - 3 second
				0	1				Sounder trigger delay - 6 second
0	0	0	0						Sounder duration - 30 second
1	0	0	0						Sounder duration - 1 minute
0	1	0	0						Sounder duration - 2 minutes
0	0	1	0						Sounder duration - 4 minutes
0	0	0	1						Sounder duration - 8 minutes



PROTECT A/S is the world's largest supplier and the only producer of Fog Cannon in Scandinavia.
PROTECT is represented worldwide in 50 countries.



SECURED IN SECONDS